
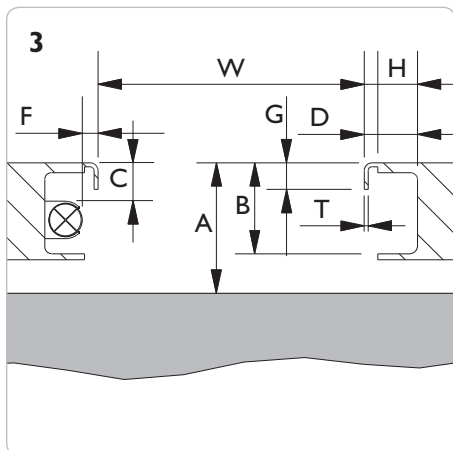
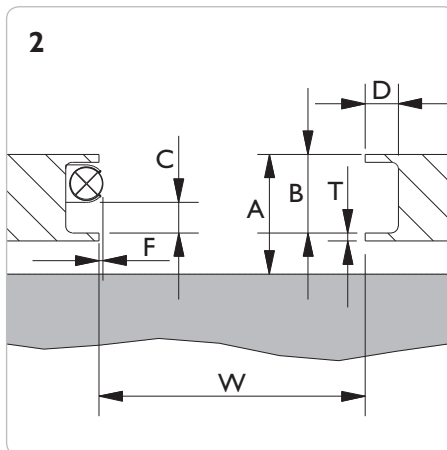


LIFT SPECIFICATION FORM

FL - Heavy duty jacking beam ☐ 6 t ☐ 12 t ☐ 16 t ☐ 20 t

SD - Jacking beam ☐ 2 t ☐ 2,6 t ☐ 3,2 t ☐ 4 t

Lift: _____ **Model:** _____ **Capacity:** _____ **Year:** _____

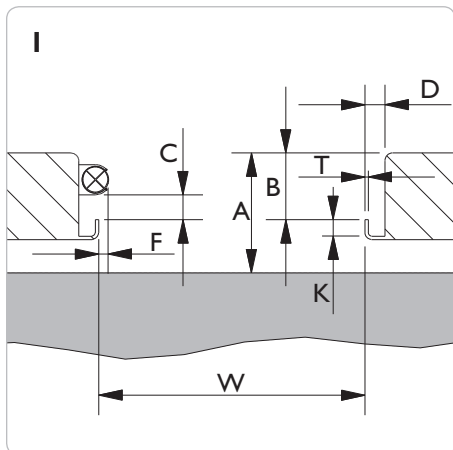

4 Drawing

Drawing no.: _____

W = _____ mm

A = _____ mm

B = _____ mm

D = _____ mm

G = _____ mm

H = _____ mm

K = _____ mm


T = _____ mm

If the lift is mounted with light  or other obstructing parts, please fill out C and F:

C min. = _____ mm

F max. = _____ mm

Rail profile

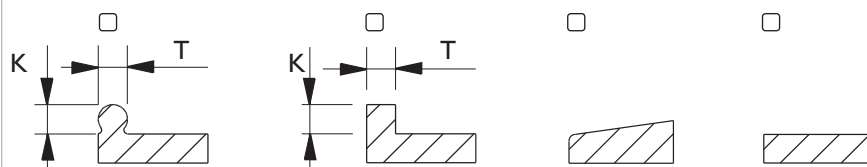

PLEASE NOTE: It is the customer's responsibility that the given measures are correct and sufficient. The lift shall always be approved by the lift manufacturer for mounting of jacking beams. **N.b. EN1493:1998 the capacity of the jacking beam cannot exceed 0,66 x the capacity of the lift.** (A 2 t jacking beam on a 3 t lift is okay - but not a 2,6 t).

Date: _____

Measured by: _____

Dealer: _____

Signature: _____

AC Hydraulic A/S




Fanøvej 6 • DK-8800 Viborg • Tel. +45 8662 2166 • Fax +45 8662 2988

E-mail: ac@ac-hydraulic.dk • www.ac-hydraulic.com

PIT SPECIFICATION FORM

GD - Pit jack single ram ☐ 10 t ☐ 15 t ☐ 20 t
GD - Pit jack twin ram ☐ 10 t ☐ 15 t ☐ 20 t
GDT - Telescopic pit jack ☐ 15 t
GGD - Floor pit jack ☐ 15 t

FL - Heavy duty jacking beam ☐ 6 t ☐ 12 t ☐ 16 t ☐ 20 t
SD - Jacking beam ☐ 2 t ☐ 2,6 t ☐ 3,2 t ☐ 4 t
ABT - Support bridge ☐ 15 t
AB - Support bridge ☐ 20 t

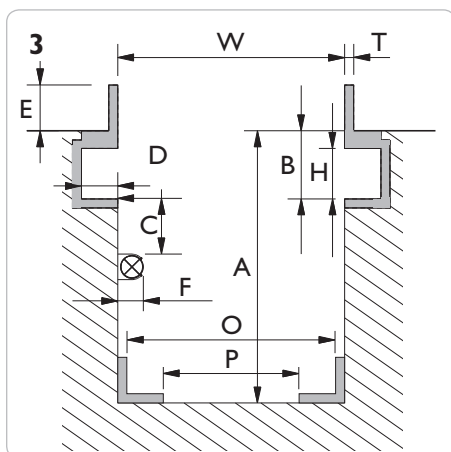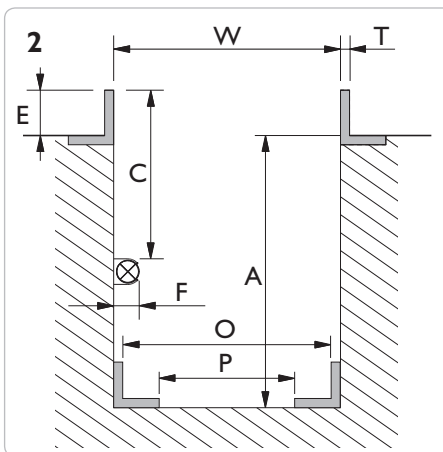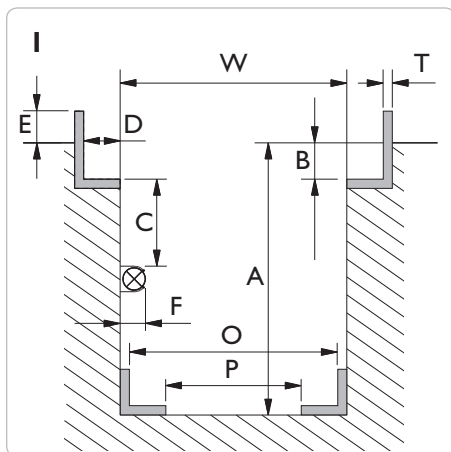

4 Drawing

Drawing no.: _____

Please measure various places along the length of the pit. **Max 12 mm variation between W min og W max. throughout the pit length**

W min. = _____ mm

W max. = _____ mm

A min. = _____ mm

B = _____ mm

D = _____ mm

E = _____ mm

H = _____ mm

T = _____ mm

If the pit is mounted with light  or other obstructing parts, please fill out C and F:

C min. = _____ mm

F max. = _____ mm

GGDI50S - Floor pit jack

O min. = _____ mm

O max. = _____ mm

P min. = _____ mm

P max. = _____ mm

Placing of saddle

The placing of top saddle **excluding** cross beam adaptor, safety stand and extensions is required:

☐ above workshop floor _____ mm

☐ levelling with workshop floor

☐ below workshop floor _____ mm

The top of the cylinder will be positioned +/- 50 mm according to requested level

Option

Please note, mounting of different options will increase the min. height:

☐ Cross beam T4-1 = + 100 mm

☐ Cross beam T5-1 = + 95 mm

☐ Cross beam T6-1 = + 55 mm

☐ Cross beam T4-2 = + 145 mm


☐ Cross beam T5-2 = + 140 mm

☐ Cross beam T6-2 = + 90 mm


☐ Safety stand S200 = + 65 mm

☐ AS3 = + 100 mm

Rolltype / Rail profile



☐ Conical/
tilted



☐ Cylindrical/
straight

PLEASE NOTE: It is the customer's responsibility that the given measures are correct and sufficient and that the pit is built and anchored to withstand the designated loading.

Date:

Measured by:

Dealer:

Signature: